

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
12 September 2003 (12.09.2003)

PCT

(10) International Publication Number
WO 03/075531 A1

(51) International Patent Classification⁷: **H04L 29/06**,
12/24

[CA/CA]; 250-120D Rideau Place, Ottawa, Ontario K1N 9N7 (CA). **SLAVITCH, Michael** [CA/CA]; 62 Renfrew Avenue, Ottawa, Ontario K1S 1Z5 (CA).

(21) International Application Number: PCT/CA03/00307

(22) International Filing Date: 6 March 2003 (06.03.2003)

(74) Agents: **WILKES, Robert, A.** et al.; Shapiro Cohen, P.O. Box 3440, Station D, Ottawa, Ontario K1P 6P1 (CA).

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/361,709 6 March 2002 (06.03.2002) US

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (*for all designated States except US*): **PEREGRINE SYSTEMS, INC.** [US/US]; 3611 Valley Centre Drive, San Diego, CA 92130 (US).

(71) Applicant and

(72) Inventor (*for CA, US only*): **RAMASWAMY, Arvind** [CA/CA]; 1380 Prince of Whales Drive, Apartment 1008, Ottawa, Ontario K2C 3N5 (CA).


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **SCHENKEL, David**

[Continued on next page]

(54) Title: METHOD AND SYSTEM FOR A NETWORK MANAGEMENT CONSOLE

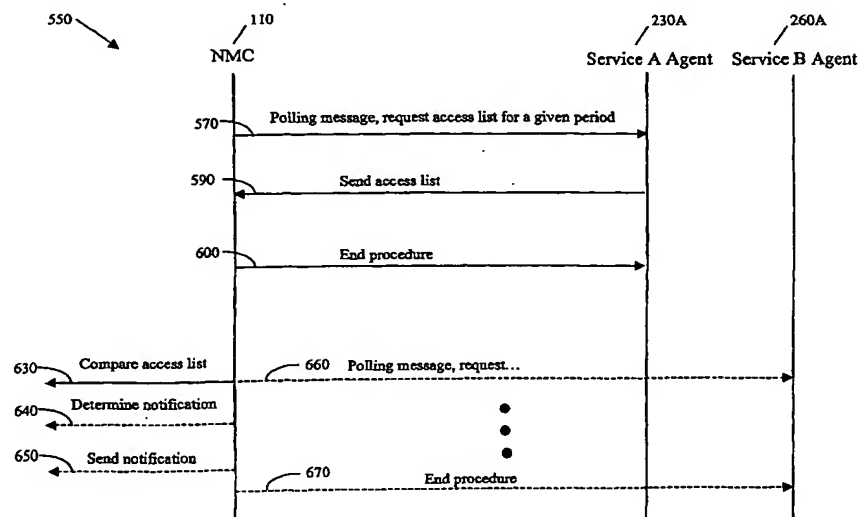

(57) Abstract: A method and a system for identifying unauthorized accesses to a data network service by a particular node in a data network is disclosed. The NMC communicates with an agent periodically to gather a list of users of the service node. An agent is installed on the service node to monitor all network accesses to the service. By configuring the agent to monitor all accesses to the service node, through SNMP or a similar protocol, the agent maintains a list of all accesses to that service node. This list is stored internally by the agent and queried for by the NMC periodically. The access information stored by the agent is periodically retrieved by the NMC for all monitored nodes and compared with the authorization list for the node. If unauthorized accesses are found, they are identified by the NMC. These unauthorized accesses can be notified to the appropriate entity in a number of ways such as through paging, email or a report viewable through the NMC.

WO 03/075531 A1

WO 03/075531 A1



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

- 1 -

METHOD AND SYSTEM FOR A NETWORK MANAGEMENT CONSOLE

BACKGROUND OF THE INVENTION

5

Field of the Invention

The present invention relates to a method and a system for identifying and notifying unauthorized access to data network services.

10

DESCRIPTION OF THE PRIOR ART

A data communications network is increasingly becoming an essential component of every organization. This component is often critical enough to require constant monitoring to ensure proper performance and authorized accesses. Various data network management tools exist for this purpose. The management tools interrogate data network devices to gather information about the device and its environment. At present, the most pervasive tool is the Simple Network Management Protocol (SNMP) – a standard implemented in network nodes to publish information for the purposes of data network management.

The model assumed by SNMP is a central management station and a number of data collection points, known to the skilled artisan as software agents, or agents. The agents are instructed by the management station of what information to collect. The management stations then collect this information from the agents through SNMP. The data and functions the agent supports are specified in a well known data structure called a Management Information Base (MIB). The MIB specifies which variables the management station contains, such as the information that can be queried and set by the management station.

- 2 -

This queried information often includes information that is sensitive to the organization and should be directed only through a Network Management Console (NMC) – a device which manages the data network. Given the increasing security consciousness of organizations these days, there is
5 sometimes reluctance on the part of the Network Operations Console (NOC), also referred to as the network administrators, to enable the SNMP service on the data network.

Although there is an authentication system built into the SNMP protocol to
10 prevent unauthorized accesses, it is rendered useless if the authentication passwords have been compromised. If the SNMP service has been enabled at various nodes in the data network for the sole purpose of communicating with an NMC for data network management, the NOC may want to be aware of "out-of-the-ordinary" accesses of service nodes in the data network. Such
15 "out-of-the-ordinary" accesses might be indicative of possible security breaches by any unauthorized users within the data network. This assumes added significance in the light of the CERT® (Computer Emergency Response Team) Advisory on SNMP, issued February 12, 2002, by the CERT® Coordination Center, which has caused increased scrutiny on the use of
20 SNMP within a data network.

One solution to prevent unauthorized accesses is the use of a firewall. Essentially, a conventional firewall is a data network node having the capability of blocking off access from a node, or nodes, within the data network to a
25 service, or services, provided by another node, or nodes, within the data network. The main purpose of a firewall is to protect a networked entity, i.e., a corporation's intranet, from unauthorized accesses while permitting authorized accesses. In essence, the firewall separates an interconnected data network into a "trusted network" and an "untrusted network". Specifically, the firewall is
30 concerned with the data interaction between the two data networks.

Although it is theoretically possible to construct a data network such that there is a firewall between every trusted group of computers, it is not the general

- 3 -

practice. Rather, a single firewall typically exists within any given intranet. Even in situations where such a data network exists, there may still be accesses within a "trusted" network that are unauthorized and require attention. For example, within an Human Resources (HR) department, there
5 could be a new recruit or a co-op student who may have access to all the machines within the department. Meanwhile, the person is only authorized to access certain machines from their node in the data network. A firewall would not detect such accesses. While a firewall could be suitably placed to achieve the same result, such an implementation would be costly as further hardware
10 is required. Furthermore, an implementation where a separate firewall is utilized every 3 to 4 network devices throughout the corporate data network, or intranet, is not practical for most organizations.

In view of the above-noted shortcomings, the present invention seeks to
15 provide a system and a method identifying unauthorized accesses to a data network service by a user node in the data network. The present invention further seeks to provide a system and a method embodied in an NMC or a similar data network management system.

20 SUMMARY OF THE INVENTION

The present invention provides both a method and a system for identifying unauthorized accesses to a data network service by a particular node in a data network. According to the present invention, the NMC communicates with an
25 agent periodically to gather a list of users of the service node. An agent is installed on the service node to monitor all network accesses to the service. By configuring the agent to monitor all accesses to the service node, through SNMP or a similar protocol, the agent maintains a list of all accesses to that service node. This list is stored internally by the agent and queried for by the
30 NMC periodically. The access information stored by the agent is periodically retrieved by the NMC for all monitored nodes and compared with the authorization list for the node. If unauthorized accesses are found, they are identified by the NMC. These unauthorized accesses can be notified to the

- 4 -

appropriate entity in a number of ways such as through paging, email, a report viewable through the NMC, or any suitable manner of notification.

5 The present invention is advantageous in that it is cost-effective and provides a software-only solution with centralized control for network-wide monitoring.

In a first aspect, the present invention provides a data network management system for identifying unauthorized access to a network service, provided at a service node in a data network, by a user node in said data network, said
10 system comprising:

a data communication means for communicating with an agent at said service node and for retrieving a user access list from said agent, said user access list including at least one network address corresponding to at least one user node in said network;
15 a database for maintaining an authorized access list for said service node; and
a data processing means for comparing said user access list to said authorized user access list and for updating said authorized user access list, said authorized user access list being
20 maintained in said database, an updated authorized user access list based on an updated user access list for said agent.

In a second aspect, the present invention provides a method for identifying unauthorized access to a network service, provided at a service node in a data
25 network, by a user node in said data network, of steps comprising:

a) retrieving a user access list, for a given period of time, from an agent at said service node in said data network;
b) comparing said user access list to an authorized access list;
c) determining an unauthorized access based on the comparison
30 step b);
d) if unauthorized access determined in step c), initiating a notification process.

- 5 -

In a third aspect, the present invention provides computer-readable medium having stored thereon, computer-readable and computer-executable instructions which, when executed by a processor, cause said processor to perform steps comprising:

- 5 a) retrieving a user access list, for a given period of time, from an agent at a service node in a data network;
- b) comparing said user access list to an authorized access list;
- c) determining an unauthorized access based on the comparison step b);
- 10 d) if unauthorized access determined in step c), initiating a notification process.

In a fourth aspect, the present invention provides in a computer for use in a data network, said computer comprising:

- 15 a storage means;
- a central processing unit;
- a data communication means for communicating with an agent at a service node and for retrieving a user access list from said agent, said user access list including at least one network
- 20 address corresponding to at least one user node in said data network;
- said storage means having a database for maintaining an authorized access list for said service node; and
- a data processing means for comparing said user access list to
- 25 said authorized user access list and for updating said authorized user access list, said authorized user access list being maintained in said database, an updated authorized user access list based on an updated user access list for said agent.

30 **BRIEF DESCRIPTION OF THE DRAWINGS**

FIGURE 1 is a block diagram of a data network having a network management system embodying the present invention.

- 6 -

FIGURE 2 is a flowchart detailing the steps for configuring the network management system in accordance with the present invention.

- 5 **FIGURE 3** is a subsidiary flowchart of **FIGURE 2** detailing the steps for identifying unauthorized accesses in a data network in accordance with the present invention.

- 10 **FIGURE 4** is a timing diagram detailing a sequence of events between the network manager and user agents located at various nodes in a data network in accordance with the present invention.

DETAILED DESCRIPTION OF THE INVENTION

- 15 The invention will be described for the purposes of illustration only in connection with certain embodiments. However, it is to be understood that other objects and advantages of the present invention will be made apparent by the following description of the drawings according to the present invention. While a preferred embodiment is disclosed, this is not intended to be limiting.
- 20 Rather, the general principles set forth herein are considered to be merely illustrative of the scope of the present invention and it is to be further understood that numerous changes may be made without straying from the scope of the present invention.
- 25 **FIGURE 1** is a block diagram of a data network **100** having a network management system **110**, hereinafter referred to as the NMC, in accordance with the present invention. For illustrative purposes, a line **120** divides the data network **100**. On the left hand side, a "trusted" network **130** is shown within the data network **100**. The "trusted" network **130** is defined as any
- 30 organization or data network of nodes within which there is no firewall. To the right of the line **120** is a conventional firewall **140**. In **FIGURE 1**, the firewall **140** protects the "trusted" network **130** from the Internet **150**.

- 7 -

A network management system, such as NMC 110, discovers devices and their attributes in a network. Apart from an Internet Protocol (IP) address, devices may have Media Access Control (MAC) addresses, unique and local Domain Name Server (DNS) names, SNMP system names, Windows™

5 names and several other discriminators. A user at a node within any given network can select a device uniquely using one of a choice of metrics. Based on those discoveries, the network management system determines the physical topology of the network.

10 It should be mentioned that the number of possible discriminators is unbounded and changing. New metrics, such as Voice over IP telephone number, are appearing as new protocols appear and existing ones are modified. As such, the present invention is not limited to such metrics which are known at the present time.

15

In **FIGURE 1**, the "trusted" data network 130 is an example of the data network arrangement of a corporation's intranet communicating through use of SNMP. There are four different services, or departments, Finance 160, Human Resources (HR) 170, Research and Development (R&D) 180, Information Technology (IT) 190. Each of the four different departments 160, 170, 180, 190, consist of either users, a database, servers, or the like. The Finance department 160 consists of User A 200, User B 210, as well as a Finance database 230. The HR department 170 consists of User C 240, User D 250, and an HR database 260. The R&D Department 180 consists of User X 270, 20 User Y 280, and User Z 290. Finally, the IT department 190 consists of the NMC 110 and a file server 300. For clarity sake, each user 200, 210, 240, 250, 270, 280, each database 230, 260, the file server 300, and the NMC 110 are independently located at nodes having corresponding network addresses within the "trusted" data network 130.

30

It is assumed that each database 230, 260, as well as the file server 300 contains data related to their corresponding department. Depending on the department, the data contained in each database may be deemed accessible

- 8 -

to only certain users. It is further assumed that each database **230, 260**, as well as the file server **300** includes an agent capable of communicating information about its node to the NMC **110** node.

5 While the present invention includes an NMC **110**, the use of software agents is an integral part of the present invention. The agent maintains a list of all accesses to network services on that node. The agent monitors network accesses to and from the node and maintains a list of accesses internally. Although we presently make use of an agent that provides this information
10 through an SNMP MIB, it is possible to utilize any other suitable software module providing similar information through a different communication method. For the purposes of **FIGURE 1**, it is assumed that the each database **230, 260**, as well as the file server **300**, include an SNMP agent.

15 Prior to operation, the NMC **110** is configured with a list of authorized users for each service node. In **FIGURE 1**, the service nodes are both databases **230, 260**, as well as the file server **300**. In some cases, a common authorization list exists for a group of user nodes, this configuration is simplified by having the NMC **110** accept a range of user nodes for a given authorization list. For
20 example, the users in the Finance Department **160** are listed in the authorization list associated with the Finance database **230**.

Further in **FIGURE 1**, the solid, linear lines illustrate an authorized access between any one of the users **200, 210, 240, 250, 270, 280**, the databases
25 **230, 260**, or the file server **300**. By comparison, the dashed, linear lines illustrate an unauthorized access between any one of the users **200, 210, 240, 250, 270, 280** and the databases **230, 260**. For example, User X **270** has authorized access to the HR database **260** but unauthorized access to the Finance Database **230**. According to the present invention, both the Finance
30 database **230** and the HR database **260** each have agents which will maintain a service access list. As User X **270** has accessed both databases, each of their agents will have stored the network address assigned to User X **270** in their service access list.

- 9 -

In operation, the NMC **110** communicates with the various nodes in the "trusted" data network, through their agents. The NMC **110**, as part of its regular operation, periodically polls each of the nodes it has discovered to retrieve information. If the node has a suitable agent installed, in addition to the regular queries it also retrieves service access information. The service access information is validated with an authorized service list for that service node. If unauthorized users are identified, they may be stored in the NMC's database (not shown) for notification.

10 According to the example in **FIGURE 1**, the NMC **110** would have retrieved the service access list from the Finance database **230** through its database agent. The service access list would have listed User X **270**, among others, such as User A **200** and User B **210**, as having accessed the Finance database **230**.

15 After retrieving service access list, the NMC **110** retrieves an authorized access list associated with the Finance database **230**, from the NMC database (not shown). By comparing the lists, the NMC **110** determines that User X **270** is not a listed authorized user on the authorized service list for the Finance database **230**. It follows that User X **270** would have been identified by the

20 NMC **110** as an unauthorized user of the Finance database **230**.

According to the present invention, the NMC **110** continues to retrieve service access lists for service nodes not previously polled in the network, as well as periodically poll service nodes already polled. In a previous step, the NMC

25 **110** would have also identified the HR database **260** as a service node. As with the Finance database **230**, the NMC **110** would retrieve the service access list from the HR database **260** through its database agent. Again, by comparing the lists, the NMC **110** would have identified User X **270** as an authorized user of the HR database **260**.

30 For every node with unauthorized users recorded in the NMC database, a notification configuration is checked to determine the appropriate notification mechanism. For example, nodes with a high enough priority may require a

- 10 -

page sent out whereas nodes, such as workstations, that are considered less significant may require an email notification to the department administrator. In addition to these asynchronous notifications, these access violations are also stored in a report maintained by the NMC 110.

5

Referring now to **FIGURE 2**, a flowchart details the steps in configuring the network management system in accordance with the present invention. In step **400**, the NMC begins the process of discovering the network by identifying all service nodes. At each service node, step **410** determines if a

10 suitable agent is already installed at the service node. If a suitable agent is installed, then step **430** is executed. If a suitable agent is not already installed, then in step **420** the NMC 110 installs a suitable agent at that node. Essentially, a software module is sent to the service node from the NMC 110. It should be mentioned that the step 420 of installing may be done manually

15 prior to, or after, commencing this process. The agent is enabled to monitor user accesses to the service node and store the access information internally. The agent may also be configured, by the NMC 110, to discard stored access information after expiry time. Upon completing step **420**, the NMC 110 is configured with an authorized access list for the service node if not in

20 existence. An authorized access list may already be present for the service node if there exists an authorized access list in the NMC 110 that is associated with a range of IP addresses and the service node is within the address range. The NMC authorized access list may include specifying an IP range of discovered nodes. Accordingly, the IP address range would be defined to

25 include the whole network and include the NMC's IP address in its authorized users access list. In step **420**, the configuration step also includes setting the polling frequency. The agent must be polled periodically such that the frequency is sufficient to collect all the access information stored by the agent prior to the expiry time of that information. Following step **430**, the process

30 then uses connector A **440** to step **440** in **FIGURE 3**. However in the process of **FIGURE 2**, connector B **450** follows from connector A **440**. The connector B **450** is used to automatically end the process at step **460**.

- 11 -

FIGURE 3 is a flowchart detailing a subsidiary process for identifying unauthorized accesses in a data network in accordance with the present invention. The process uses connector A **440** to begin with by step **470**. In step **470**, it is determined whether the NMC should poll the agent at a specific service node, i.e. retrieve user access information. This determination might be based on whether the information stored in the service node is critical to the integrity of the data network. If it is determined that the agent for a specific service node is not to be polled, the process ends by using connector B **450** to return to step **460**, as explained with reference to **FIGURE 2**. Otherwise, the agent of the selected service node is polled. In step **480**, the NMC retrieves a user access list from the agent at the service node. Next, step **490** the NMC compares the user access list with an authorized access list associated with the service node. Based on the comparison in step **490**, step **500** determines whether an unauthorized access of a service node was identified. If step **500** does not identify an unauthorized access, then step **510** is executed. If an unauthorized access was identified in step **500**, then step **520** selects a suitable notification mechanism. Finally, in step **520**, the authorized access list stored in the NMC is updated with any access information sent by the agent of the service node. The process is then ended by using connector B **450** to return to step **460** of **FIGURE 2**.

In **FIGURE 3**, the frequency of the polling step **470** by the NMC is adjustable by the NOC. Increased frequency results in shorter average delays in the notification of problems at the cost of increased network traffic. The NMC is also configured with a list of authorized users for each node. Since in most cases, a common authorization list exists for a group of nodes, this configuration is simplified by the NMC maintaining a range of nodes for a given authorization list. For each unique authorization list, the NMC simply determines whether a user node is within the range of nodes authorized to access the service node.

FIGURE 4 illustrates a timing diagram detailing a sequence of events between the NMC **110** and the service agents, **230A** and **260A**, respectively. In

- 12 -

FIGURE 4, the dashed lines indicate that the events are conditional for reasons explained earlier in examples from **FIGURES 1, 2, and 3**. According to the timing diagram, the **NMC 110** and the service A agent **230A** communicate in a series of events, **570, 590, and 600**. Basically, these events enable the **NMC 110** to request and retrieve the access list from the service A agent **230A**. The internal NMC events which follow, **630, 640, 650**, are performed within the **NMC 110**. The event **630** enables the **NMC 110** to compare the access list with an authorized user list stored in the NMC database. Based on the comparison, unauthorized users are identified. The subsequent events **640** and **650** are conditional on whether an unauthorized user has been identified. If an unauthorized user is identified, the **NMC 110** selects a suitable notification mechanism in event **640** and then sends the notification in event **650**. The events **660** through to **670** are executed concomitantly with the internal NMC events **630, 640, 650**. The events **660** through **670** represent the request and retrieval of an access list from the service B agent **260A** by the **NMC 110**. The timing diagram should illustrate that while the **NMC 110** is executing the notification event **650** with respect to an unauthorized user, the **NMC 110** may also be retrieving data from the service B agent **260A**. The multi-tasking ability of the **NMC 110** is advantageous in that the identification and the notification of unauthorized users for various services nodes may be performed simultaneously, not just one service node for a given time interval.

While it would be preferable if an available or installed agent sent the network service access list through SNMP, other message protocols may be utilized for the purposes of the present invention. The **NMC** could also retrieve the authorization access list by querying a Lightweight Directory Access Protocol (LDAP) server, for example, or by some other method. In networks where a standard SNMP agent on a node is utilized, the present invention would not require any modifications to the node apart from some software configuration settings on the agent which can be done automatically from the **NMC**.

- 13 -

Furthermore, the present invention is not limited to use in a "trusted" data network. The present invention is also applicable to external data networks where the identification of unauthorized accesses is required. Both the system and method of the present invention are also applicable to other data network .
5 services. For example, in a network running an Oracle™ database, created by Oracle, where sensitive data is managed, there may be a need to ensure that only authorized users access the service over the data network.

10 It should be understood that the preferred embodiments mentioned here are merely illustrative of the present invention. Numerous variations in design and use of the present invention may be contemplated in view of the following claims without straying from the intended scope and field of the invention herein disclosed.

- 14 -

Having thus described the invention, what is claimed as new and secured by Letters Patent is:

1. A data network management system for identifying unauthorized
5 access to a data network service, provided at a service node in a data network, by a user node in said data network, said system comprising:
a data communication means for communicating with an agent at said service node and for retrieving a user access list from said agent, said user access list including at least one data network address corresponding to
10 at least one user node in said data network;
a database for maintaining an authorized access list for said service node; and
a data processing means for comparing said user access list to said authorized user access list and for updating said authorized user access
15 list, said authorized user access list being maintained in said database, an updated authorized user access list based on an updated user access list for said agent.
2. A data network management system as defined in claim 1,
20 wherein said agent is a Simple Network Management Protocol agent.
3. A data network management system as defined in claim 1,
wherein said data communication means is a Simple Network Management Protocol communication means.
25
4. A data network management system as defined in claim 1, further including means for installing an agent at said service node, said agent having means to communicate with said data communication means.
- 30 5. A method for identifying unauthorized access to a data network service, provided at a service node in a data network, by a user node in said data network, of steps comprising:

- 15 -

a) retrieving a user access list, for a given period of time, from an agent at said service node in said data network;

b) comparing said user access list to an authorized access list;

c) determining an unauthorized access based on said comparison

5 step b);

d) if unauthorized access determined in step c), initiating a notification process.

6. A method as defined in claim 5, further including a step of updating
10 said authorized access list based on an updated user access list provided by said agent.

7. A method as defined in claim 5, further including a step of
installing said agent at said user node, prior to retrieving said user access list
15 in step a).

8. A method as defined in claim 5, further including a step of
selecting said service node for identification based on a predetermined criteria,
prior to retrieving said user access list in step a).

20

9. A method as defined in claim 5, wherein said notification process
further including a step of notifying a Network Operations Console.

10. A method as defined in claim 5, wherein steps a) through c) are
25 repeated, and wherein said user node is selected from one of a plurality of user nodes in said data network.

11. A method as defined in claim 5, wherein steps a) through d) are
repeated, and wherein said user node is selected from one of a plurality of
30 user nodes in said data network.

12. A method as defined in claim 5, wherein said agent is a Simple
Network Management Protocol agent.

- 16 -

13. A computer-readable medium having stored thereon, computer-readable and computer-executable instructions which, when executed by a processor, cause said processor to perform steps comprising:

- 5 a) retrieving a user access list, for a given period of time, from an agent at a service node in a data network;
- b) comparing said user access list to an authorized access list;
- c) determining an unauthorized access based on the comparison step b);
- 10 d) if unauthorized access determined in step c), initiating a notification process.

14. A computer-readable medium as defined in claim 13, further containing computer-readable and computer-executable instructions which

15 perform a step of updating said authorized access list based on user access information.

15. A computer-readable medium as defined in claim 13, further containing computer-readable and computer-executable instructions which

20 perform a step of installing said agent at said user node, prior to retrieving said user access list in step a).

16. A computer-readable medium as defined in claim 13, further containing computer-readable and computer-executable instructions wherein

25 said steps a) through c) are repeated, and wherein said user node is selected from one of a plurality of user nodes in said data network.

17. A computer-readable medium as defined in claim 13, wherein said agent is a Simple Network Management Protocol agent.

30

18. In a computer for use in a data network, said computer comprising:

a storage means;

a central processing unit;

- 17 -

a data communication means for communicating with an agent at a service node and for retrieving a user access list from said agent, said user access list including at least one data network address corresponding to at least one user node in said data network;


5

said storage means having a database for maintaining an authorized access list for said service node; and

10

a data processing means for comparing said user access list to said authorized user access list and for updating said authorized user access list, said authorized user access list being maintained in said database, an updated authorized user access list based on an updated user access list for said agent.

15

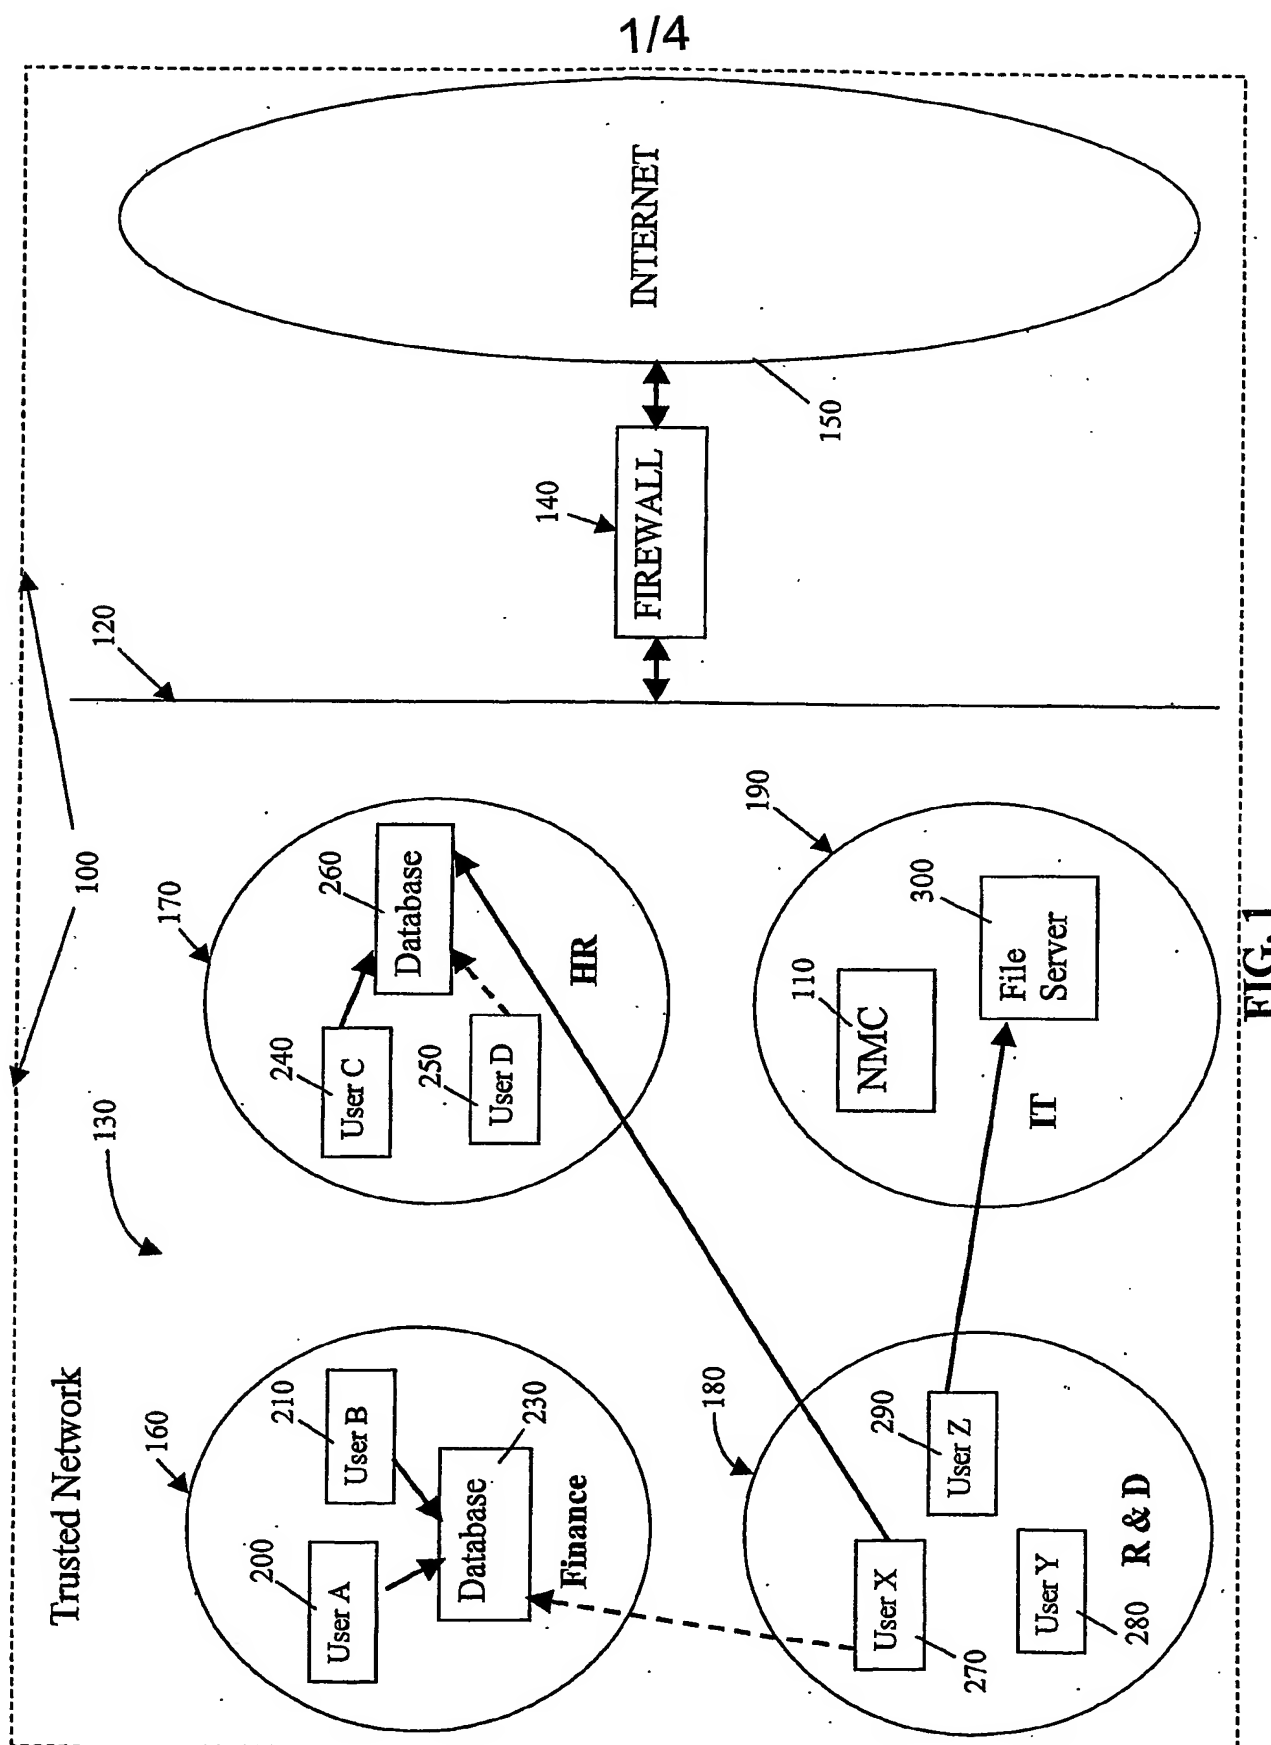

2/4

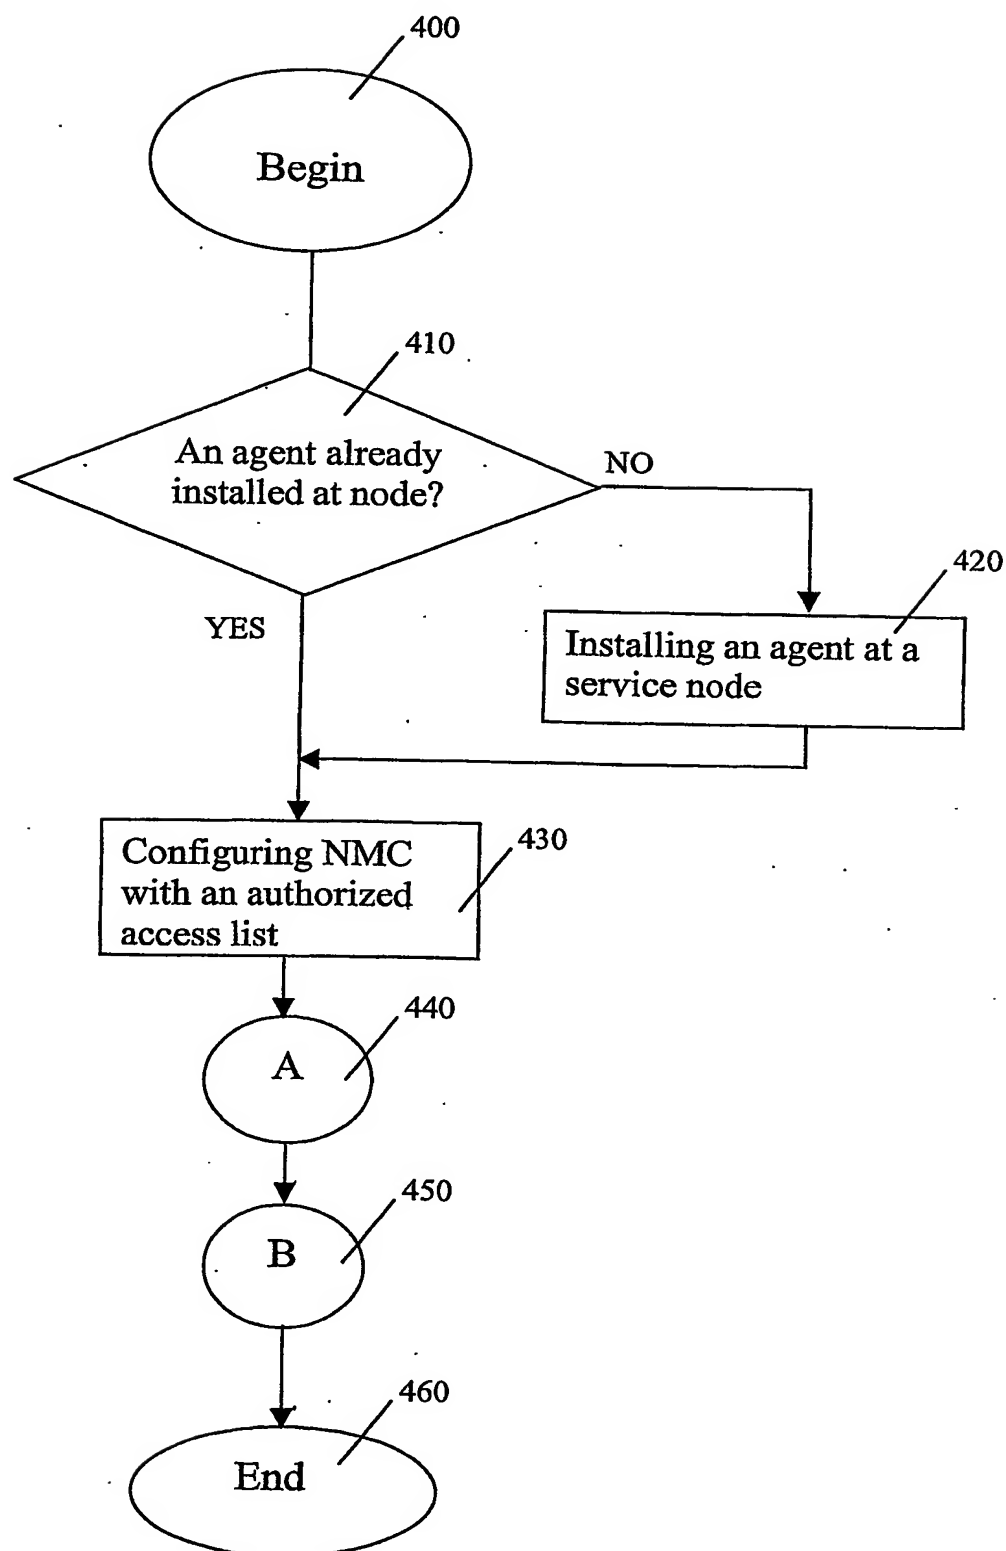


FIG. 2

3/4

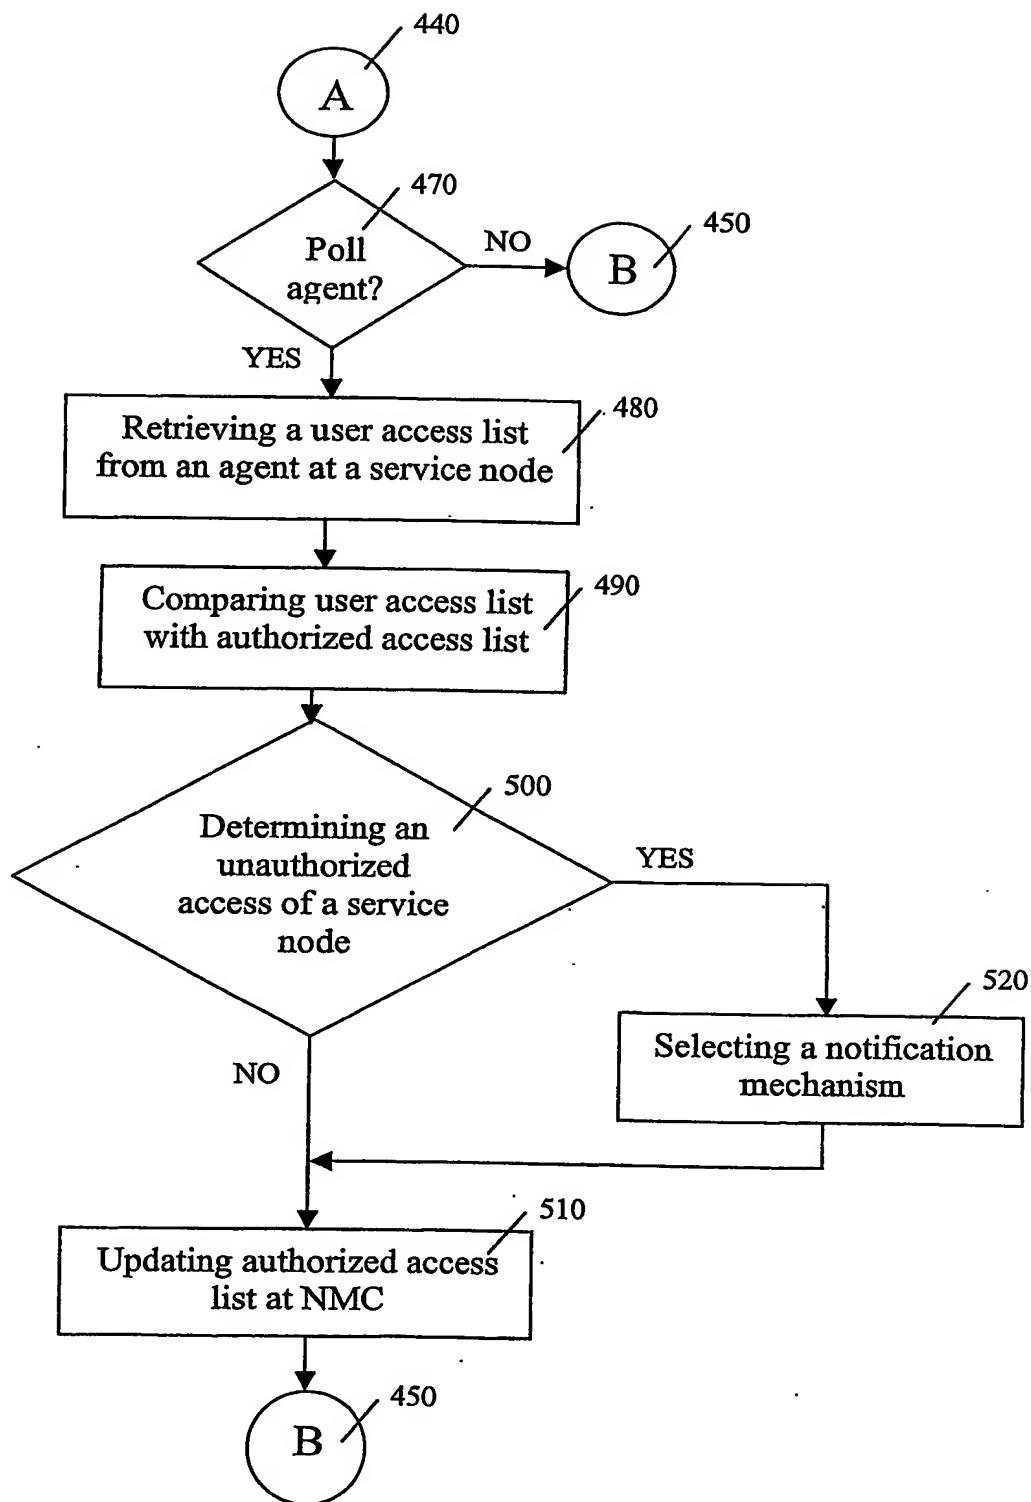


FIG. 3

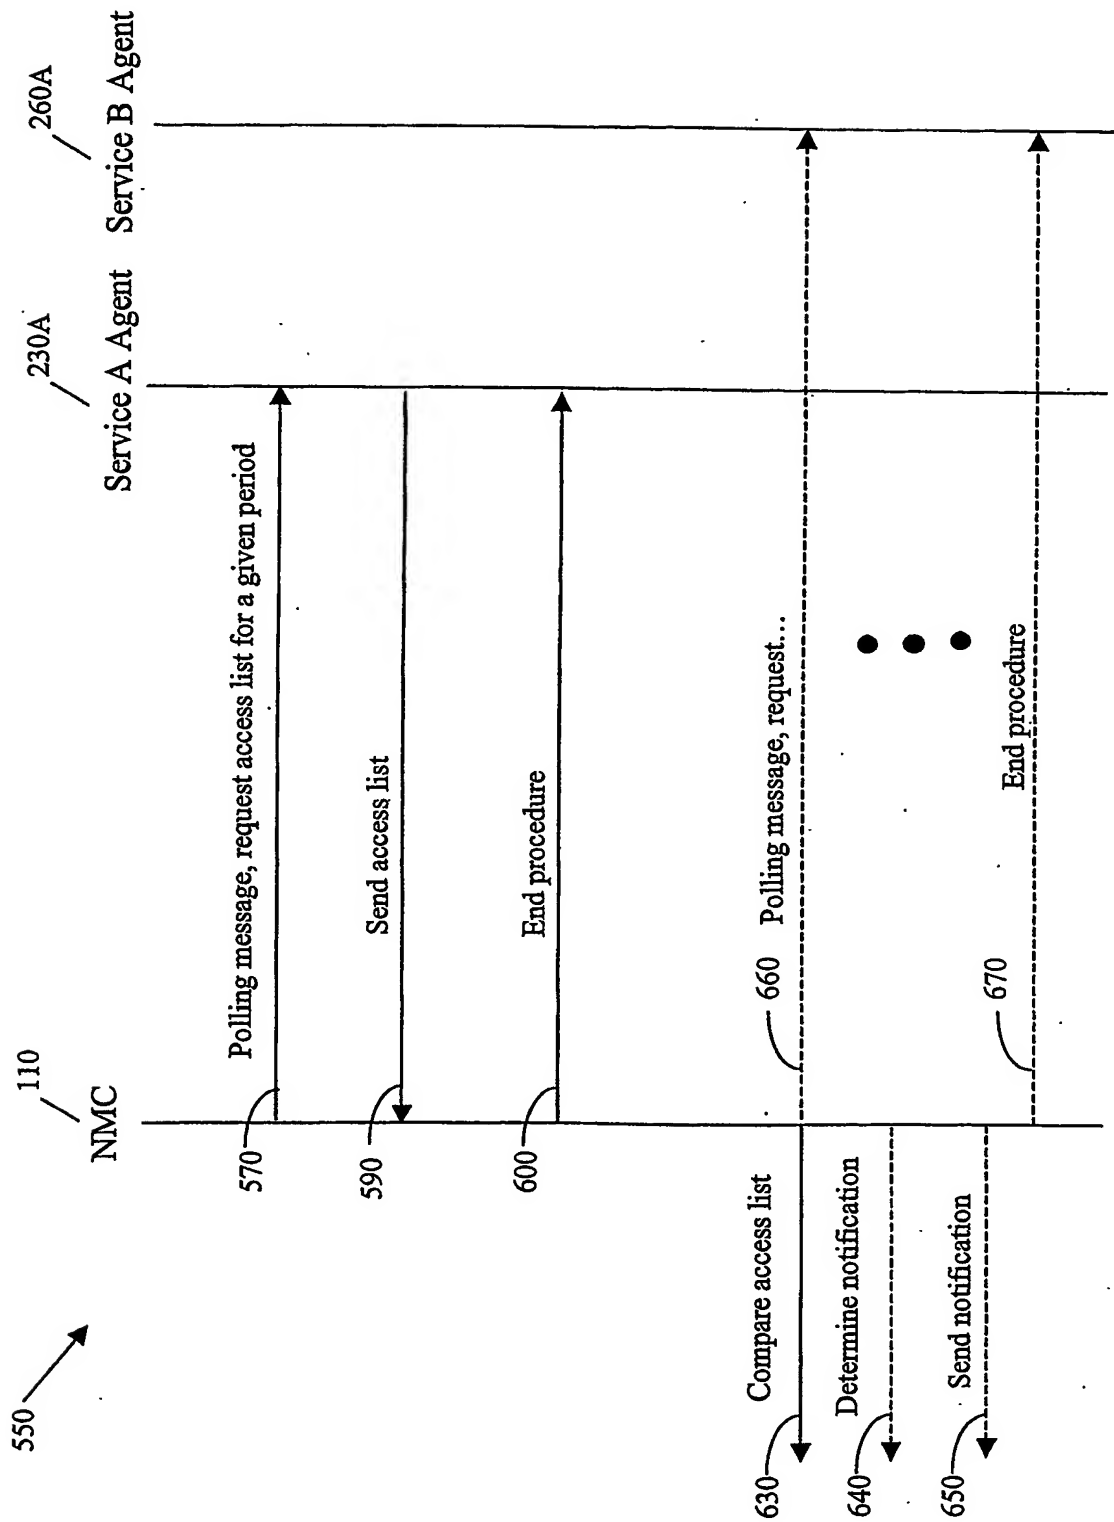


FIG. 4

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/CA 03/00307

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 H04L29/06 H04L12/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data,- PAJ, INSPEC, IBM-TDB

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 580 350 A (DIGITAL EQUIPMENT CORP) 26 January 1994 (1994-01-26) abstract page 2, column 1, line 1 - line 7 page 2, column 1, line 51 - column 2, line 32 page 5, column 8, line 20 - page 6, column 10, line 34	1-18
A	WO 02 14987 A (BAHARAV YUVAL ;GADISH OFER (IL); CAMELOT INFORMATION TECHNOLOGI (I) 21 February 2002 (2002-02-21) abstract page 1, paragraph 4 - paragraph 5 page 17, paragraph 53 - paragraph 62	1-18



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

29 April 2003

Date of mailing of the international search report

09/05/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Adkhis, F

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
EP 0580350	A	26-01-1994	US	5235642 A		10-08-1993
			EP	0580350 A1		26-01-1994
			JP	6202998 A		22-07-1994
<hr/>						
WO 0214987	A	21-02-2002	AU	9408301 A		25-02-2002
			AU	9408401 A		25-02-2002
			AU	9408901 A		25-02-2002
			AU	9411001 A		25-02-2002
			WO	0214987 A2		21-02-2002
			WO	0214988 A2		21-02-2002
			WO	0215122 A2		21-02-2002
			WO	0214989 A2		21-02-2002
<hr/>						